

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H


H

I


I

J

J

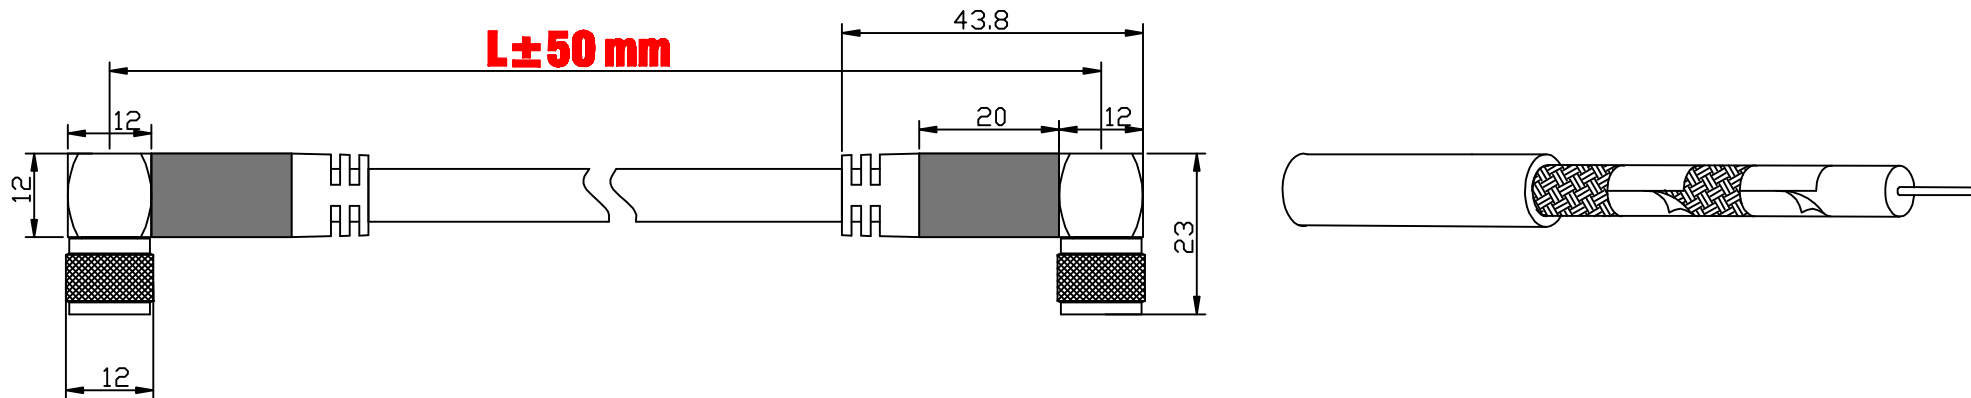

### Schaltplan Wiring diagram



| Nr. / No. | Beschreibung / Description                 |
|-----------|--------------------------------------------|
| 70567     | HiEnd SAT Antenna cable 90° F/F 0100 black |
| 70481     | HiEnd SAT Antenna cable 90° F/F 0100 white |
| 70573     | HiEnd SAT Antenna cable 90° F/F 0200 black |
| 70483     | HiEnd SAT Antenna cable 90° F/F 0200 white |
| 70578     | HiEnd SAT Antenna cable 90° F/F 0300 black |
| 70484     | HiEnd SAT Antenna cable 90° F/F 0300 white |
| 70584     | HiEnd SAT Antenna cable 90° F/F 0500 black |
| 70485     | HiEnd SAT Antenna cable 90° F/F 0500 white |
| 70589     | HiEnd SAT Antenna cable 90° F/F 1000 black |
| 70490     | HiEnd SAT Antenna cable 90° F/F 1000 white |

### SAT Antennenkabel

- Ideal für hochauflösende Übertragungen (HD-TV, Full HD, Ultra HD (UHD / 4K und höher) bei digitalen SAT-Signalen wie DVB-S und DVB-S2. Zuverlässige Verbindung zwischen Anschluss-/Multimediodose und dem Empfangsgerät wie Fernseher/ Sat-Receiver/ Kabelmodem/ Kabelrouter etc.
- Anschlüsse: F-Stecker 90° gewinkelt
- OFC Innenleiter
- PVC/PE Ummantelung
- 4-fache Schirmung: (2-fach AlMg Geflecht und 2-fach Al Folie)
- 135 dB Schirmungsmaß
- Vollmetall-Stecker mit vergoldeten Kontakten
- breite, griffige Metallkappen
- optimierter Knickschutz und flexible Kabelummantelung
- Isolationswiderstand: 10 Ohm bis 500 V DC
- Durchschlagsfestigkeit: 1 kV, 50 Hz, 2 s
- Konformität: RoHS/REACH

### SAT antenna cable

- Ideal for high-definition broadcasts (HDTV, FullHD, UltraHD (UHD / 4K and higher) for digital SAT signals such as DVB-S and DVB-S2. Reliable connection between connection / multimedia box and the receiving device such as TV / satellite receiver / cable modem / cable router etc.
- Connections: F connector 90° angled
- OFC inner conductor
- PVC / PE sheath
- 4-fold shielding: (2-fold AlMg mesh and 2-fold Al foil)
- 135 dB shielding measure
- Full metal plug with gold plated contacts
- wide, handy metal caps
- optimized kink protection and flexible cable sheathing
- Insulation resistance: 10 Ohms to 500 V DC
- Dielectric strength: 1 kV, 50 Hz, 2 s
- Conformity: RoHS / REACH

### Änderungen

| Datum | Name | gez.:                                      | Datum      | Name |
|-------|------|--------------------------------------------|------------|------|
|       |      | gez.:                                      | 21.09.2018 | tf   |
|       |      | gepr.:                                     | 21.09.2018 | tf   |
|       |      | Norm:                                      |            |      |
|       |      | Änderungen vorbehalten / Subject to change |            |      |

### Bezeichnung

HiEnd SAT Antenna cable 90° F/F



### Zeichnungs-Nr.:

### Blatt

von

1 2 3 4 5 6 7 8 9 10 11 12 13 14